
Printed 1/20/2016, 8:42:24 AM [C58]

215

NOTES: 1. REFER TO IPC/WHMA-620 STANDARD FOR RECOMMENDED PRACTICES ON HARNESS ASSEMBLY AND TESTING 2. LABEL CONNECTOR AS INDICATED IN BRACKETS

3. APPLY PROPER SIZE HEATSHRINK TO CABLE ENDS

4. ALL MEASUREMENTS ARE IN INCHES, ALL MEASUREMENTS ARE TO WIRE ENTRY OF EACH CONNECTOR AND WIRE END OR TERMINAL THAT DOES NOT ENTER A CONNECTOR

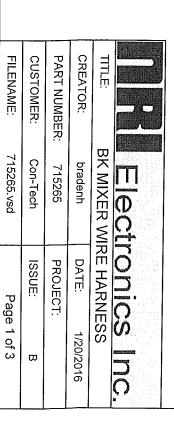

C58

× < < C -	N	20 6	D	0	z	Z	г	$\overline{\lambda}$	ر	Н	ធ	П	Ш	D	ဂ	В	Þ
	1 1	GRN/BLK		WHT/BLK-								BLKWHT	BLACK————————————————————————————————————	BLK/RED	D ——————BLUE————BLUE——————————————————————	BLU/BLK	BLUWHT————BLUWHT————————————————————————————————————
× < < C H	S	۵۵	ס	0	z	<u> </u>	- ;	\ \ \	-[:	<u> </u>	G		m			В	\triangleright

CREATOR: FILENAME: PART NUMBER: TITLE: CUSTOMER: 715265.vsd Con-Tech bradenh Electronics Inc. 715265 DATE: ISSUE: PROJECT: Page 3 of 3 1/20/2016 ϖ

C28